

**3**  
**YEARS**  
WARRANTY



## DC-8600

Next generation  
Re-transfer printing



### HIGHLIGHTS AT A GLANCE:

- High resolution printing with 600 dpi
- High productivity due to high speed printing
- Over-the-Edge full card printing
- High capacity card feeder
- Prepared for encoders


# DC-8600

The DC-8600 is the next generation re-transfer printer from DASCOCM. Available in two models the printer can hold up two different cards with a maximum capacity of 450 cards. With a print speed of up to 170 cards/hour and high capacity ribbons for 500 images the printer is not scared of large print jobs.

Both models have a USB and an Ethernet interface as standard. The administration can be done via a browser through the DASCOCM WebPanel.

## TECHNICAL DATA

<b>Print Method</b>	Colour dye sublimation re-transfer technology
<b>Resolution</b>	600 dpi
<b>Print Capability</b>	Single Side, Double Side, Over-the-Edge, photo quality image colour
<b>Print Speed</b>	Single Side: 21 sec. Double Side: 43 sec.
<b>Interfaces</b>	USB (2.0), Ethernet (10/100)
<b>Card Thickness</b>	0,5 - 1,1 mm (20 - 50 mil)
<b>Security Features</b>	RFID ribbon, card feeder lock, custom watermarks (BMP)
<b>Card Loading</b>	<i>Standard:</i> Card feeder for 250 cards (0,76 mm thickness) <i>Double Bin:</i> Card feeder for 250 cards and 2nd card hopper for 200 cards Manual feed: single card
<b>Card Types</b>	PVC, PET, PET-G, PC 85,6 x 53,98 mm (ISO ID-1/CR-80 size)
<b>Consumables</b>	Ribbon YMCK (500 Images), Ribbon YMCKH (400 Images), Ribbon YMCKK (400 Images), Ribbon YMCKSI (350 Images), Transfer Film YMCK (500 Images)
<b>Cleaning</b>	Cleaning Card (included in Transfer Film) Cleaning Roller (includes in Transfer Film and Ribbon)
<b>Physical Weight</b>	<i>Standard:</i> 13,3 kg <i>Double Bin:</i> 15 kg
<b>Physical Size</b>	<i>Standard:</i> 248 x 339 x 408 mm (W x D x H) <i>Double Bin:</i> 248 x 466 x 408 mm (W x D x H)
<b>Power Voltage</b>	Auto wide ranging, 100 - 240 V AC - 50/60 Hz
<b>Environment</b>	Printing: +15° to +30° C Temperature; 35 - 95% Humidity Storage: +5° C to +45° C Temperature; 35 - 95% Humidity
<b>Driver</b>	Windows 7/8/10/11 (32 and 64 Bit), Windows Server 2012/2016/2019/2022, Linux macOS Monterey (12.x) Ventura (13.x), Sonoma (14.x), Sequia (15.x) for Intel and M chipset Linux
<b>Optional Encoder</b>	Encoder prepared
<b>Warranty</b>	For more details please contact your local dealer

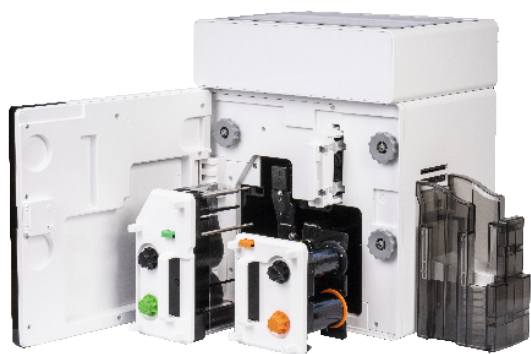

Standard model



Double Bin model

**DASCOCM GB Ltd**  
Hart House, Priestley Road  
Basingstoke | Hampshire RG24 9PU | ENGLAND  
Tel.: +44 1256 355 130 | Fax: +44 1256 481 400  
info.gb@dascom-com | www.dascom.co.uk

**DASCOCM Europe GmbH**  
Heuweg 3 | 89079 Ulm | GERMANY  
Tel.: +49 731 2075-0 | Fax: +49 731 2075-100  
info@dascom.com | www.dascomeurope.de

**DASCOCM (Holdings) LTD.**  
R. 1811-1816A | Nan Fung Centre  
264-298 Castle Peak Road | Tuen Wan, N. T. | Hong Kong  
Tel.: +852 2498 1507 | Fax: +852 2413 6047